


AG 1000 LT

INDUSTRIAL MAINTENANCE
Exhaust gas hoses

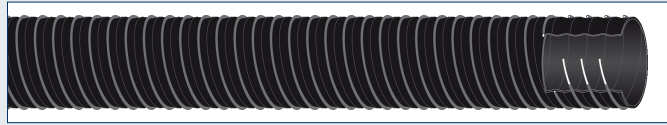

Applications

Extraction of exhaust gases and other hot gases from motor vehicles.
For all types of spring recoil exhaust hose reels, exhaust fume extractors, and also exhaust rails for moving vehicles.

Advantages

- n Extremely low weight and flexibility makes the hose especially suitable for manual handling.
- n Smooth inside reduces friction losses.
- n Hose lengths can be connected by screwing them together.

Technical description

Inner tube: heat resistant rubberized fabric EPDM polyester, black.
Reinforcement: EPDM-coated steel, black.
Temperature range: - 40 °C to + 150 °C .

Complementary information

Delivered in plastic wrapped coils.

AG 1000 LT

01/03/2011

ID mm	Wall thickness mm	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m
76	1.0	0.25	95	0.6	10	5014503	100
102	1.0	0.20	110	0.74	10	5014504	100
127	1.0	0.15	130	0.91	10	5014505	100
152	1.0	0.10	140	1.1	10	5014506	100

Branding

No branding



TRELLEBORG
ENGINEERED SYSTEMS

Trelleborg Industrie SAS - ZI La Combaude - Rue de Chantemerle - 63050 Clermont-Ferrand Cedex 2 - France
www.trelleborg.com/industrialhose