


KLEGAINE GHT 650

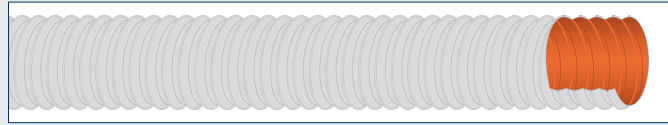

INDUSTRIAL MAINTENANCE
Industrial ducting hoses/Elastomer-coated fibre cord

Applications


Extreme temperature ducting for conveying hot, air, gas and dust in any industrial environment: steel industry.

Advantages

- n Good chemical resistance.
- n Good heat, ozone and UV resistance.
- n Compressible.

Technical description

Flexible and lighth ducting, made with 2 layers of coated glass fibre.
Metal clipped helix.
Inner tube: brik-red.
Cover: grey.
Temperature range: - 20 °C to + 650 °C (700 °C temporarily).

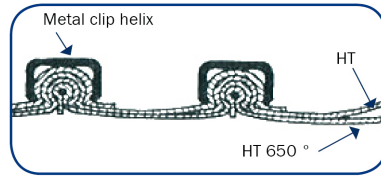

Complementary information

Technical data for working conditions at 20 °C temperature.

KLEGAINE GHT 650

08/07/2011

ID mm	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m
50	0.360	60	0.72	3	5501591	3
60	0.260	70	0.86	3	5501592	3
70	0.190	85	1.0	3	5501593	3
75	0.160	90	1.08	3	5501594	3
80	0.150	95	1.16	3	5501595	3
90	0.120	115	1.6	3	5501596	3
102	0.100	125	1.76	3	5501597	3
110	0.080	140	1.94	3	5501598	3
120	0.060	150	2.2	3	5501599	3
127	0.060	155	2.2	3	5501600	3
130	0.060	160	2.3	3	5501635	▣
152	0.040	160	2.25	3	5501601	3
160	0.040	170	2.4	3	5501602	3
180	0.030	190	2.7	3	5501603	3
203	0.024	200	2.7	3	5501604	3
250	0.016	240	3.3	3	5501605	3
300	0.011	250	3.46	3	5501606	3
350	0.008	300	4.0	3	5501607	3
400	0.006	350	4.6	3	5501608	3
450	0.005	360	4.7	3	5501636	▣
500	0.004	400	5.25	3	5501609	3
550	0.003	440	5.75	3	5501637	▣
600	0.003	480	6.25	3	5501610	3
700	0.002	550	7.3	3	5501611	3
800	0.002	650	8.3	3	5501612	3
900	0.001	720	9.3	3	5501613	3
1000	0.001	800	10.4	3	5501614	3

▣ Upon availability.

Branding

No branding.



Trelleborg Industrie SAS - ZI La Combaude - Rue de Chantemerle - 63050 Clermont-Ferrand Cedex 2 - France
www.trelleborg.com/industrialhose