


KLEGAINE GHYP

INDUSTRIAL MAINTENANCE
Industrial ducting hoses/Elastomer-coated fibre cord

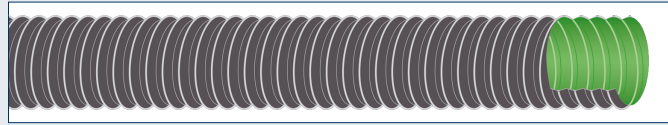

Applications


Ducting for chemical air, gas and dust in any industrial environment.

Advantages

- n Good chemical resistance.
- n Good heat, ozone and UV resistance.
- n Compressible.

Technical description

Hypalon coated-polyester.
Metal clipped helix.
Inner tube: green.
Cover: black.
Temperature range: - 40 °C to + 175 °C .

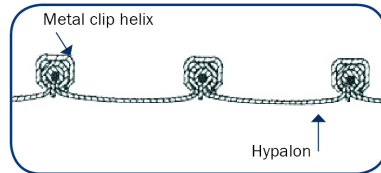

Complementary information

Technical data for working conditions at 20 °C temperature.

KLEGAINE GHYP

08/07/2011

ID mm	Working pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m
50	0.85	0.40	30	0.4	10	5501568	10
60	0.78	0.28	36	0.48	10	5501569	10
70	0.67	0.22	40	0.55	10	5501570	10
76	0.6	0.17	45	0.6	10	5501571	10
80	0.58	0.16	48	0.62	10	5501572	10
90	0.5	0.11	60	0.65	10	5501628	▣
102	0.5	0.10	60	0.65	10	5501573	10
110	0.48	0.08	66	0.7	10	5501574	10
120	0.35	0.06	72	0.72	10	5501575	10
127	0.32	0.06	75	0.8	10	5501576	10
130	0.25	0.06	85	0.89	10	5501629	▣
152	0.22	0.04	90	0.9	10	5501577	10
160	0.21	0.04	96	0.94	10	5501578	10
180	0.17	0.03	108	1.05	10	5501579	10
203	0.15	0.01	120	1.21	10	5501580	10
254	0.1	0.01	175	1.7	10	5501581	10
305	0.07	0.01	210	2.13	10	5501582	10
350	0.06	0.01	245	2.5	10	5501583	10
407	0.05	0.01	280	3.15	5	5501584	5
450	0.04	0.01	360	3.1	5	5501630	▣
508	0.04	0.01	400	4.15	5	5501585	5
550	0.03	0.004	400	3.4	5	5501631	▣
600	0.03	0.003	480	4.08	5	5501586	5
700	0.02	0.002	560	4.76	5	5501587	5
800	0.02	0.002	639	5.44	5	5501588	5
900	0.02	0.001	719	6.12	5	5501589	5
1000	0.02	0.001	799	6.8	5	5501590	5

▣ Upon availability.

Branding

No branding.



Trelleborg Industrie SAS - ZI La Combaude - Rue de Chantemerle - 63050 Clermont-Ferrand Cedex 2 - France
www.trelleborg.com/industrialhose