

KLEGAINE GLV

INDUSTRIAL MAINTENANCE
Industrial ducting hoses/PVC




Applications

Used to convey air for aeration, ventilation and heating (hot air generator, navy, fire fighting, airports ..., possible options for mining and tunneling).
Dog agility.

Advantages

- Extremely flexible.
- Light weight and custom-made.
- Highly compressible and therefore easy to transport and store.
- Wide range of diameters.

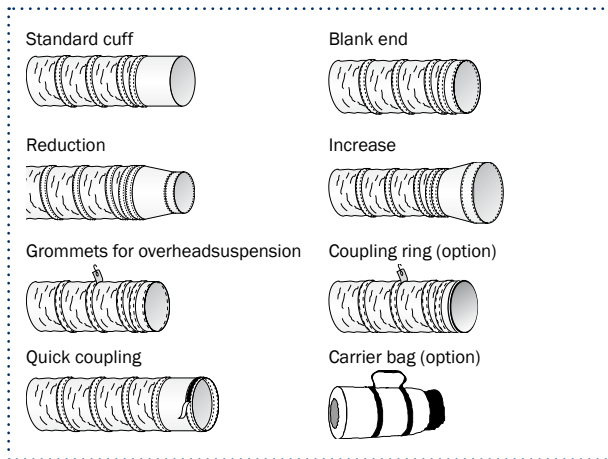

Technical description

PVC-coated polyester fibre cord, yellow, sewn in spiral onto a spring steel helix. An exterior black PVC scuff strip protects the helix.
Temperature range: 0 °C to + 95 °C.
Standard/Approval: fire resistant according to the french regulation M2.

Couplings and fittings

Standard: connexion by clamp.
Option on request: coupling ring and clamp.
Accessories and cuffs: see opposite.

Complementary information

Standard production length = 7.5 m (with standard cuffs).
Other lengths on request (min. length = 0.5 m).
Packaging in card board boxes.

KLEGAINE GLV

18/02/2009

ID	Wall thickness		Length cuffs	Working pressure	Max vacuum	Bending radius	Weight	Length	Article number	Stock (■) or min. order
mm	mm		mm	bar	bar	mm	kg/m	m		m
125	0.22	± 0.02	100	0.55	0.045	NS	0.59	7.5	0085788	0.5
150	0.22	± 0.02	100	0.40	0.042	NS	0.79	7.5	0085789	0.5
160	0.22	± 0.02	100	0.40	0.042	NS	0.84	7.5	5009192	0.5
170	0.22	± 0.02	100	0.40	0.042	NS	0.89	7.5	5009193	0.5
180	0.22	± 0.02	100	0.40	0.042	NS	0.95	7.5	0085790	0.5
200	0.22	± 0.02	150	0.35	0.034	NS	0.95	7.5	0085818	0.5
225	0.22	± 0.02	150	0.35	0.032	NS	1.05	7.5	0085791	0.5
250	0.22	± 0.02	150	0.30	0.031	NS	1.17	7.5	0085793	0.5
300	0.22	± 0.02	150	0.25	0.025	NS	1.41	7.5	0085794	0.5
350	0.22	± 0.02	180	0.20	0.022	NS	1.75	7.5	0085795	0.5
400	0.22	± 0.02	180	0.15	0.022	NS	2.01	7.5	0085797	0.5
450	0.22	± 0.02	180	0.15	0.020	NS	2.26	7.5	0085799	0.5
500	0.22	± 0.02	180	0.15	0.020	NS	2.51	7.5	0085628	0.5
600	0.22	± 0.02	180	0.10	0.020	NS	3.01	7.5	0085801	0.5
700	0.22	± 0.02	180	0.05	0.016	NS	3.51	7.5	5009194	0.5
750	0.22	± 0.02	250	0.05	0.014	NS	3.53	7.5	5009195	0.5
800	0.22	± 0.02	250	0.03	0.012	NS	3.77	7.5	5009196	0.5
850	0.22	± 0.02	250	0.03	0.010	NS	4.00	7.5	5009197	0.5
900	0.22	± 0.02	250	0.03	0.008	NS	4.24	7.5	5009198	0.5
950	0.22	± 0.02	250	0.03	0.006	NS	4.48	7.5	5009199	0.5
1000	0.22	± 0.02	250	0.03	0.005	NS	4.71	7.5	5009200	0.5

Technical data for working conditions at 20 °C temperature.

No branding

