


# KLEGAINE GTLN

INDUSTRIAL MAINTENANCE  
Industrial ducting hoses/Elastomer-coated fibre cord

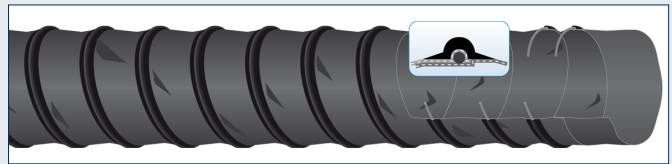


## Applications

For handling air and hot fumes.  
Hot air generator: civil or military.

## Advantages

- n Extremely flexible.
- n Flame resistant properties.
- n Light weight and custom-made.
- n Highly compressible and therefore easy to transport and store.
- n Wide range of diameters.
- n Good resistance to chemicals in the vapour phase at moderate concentration.

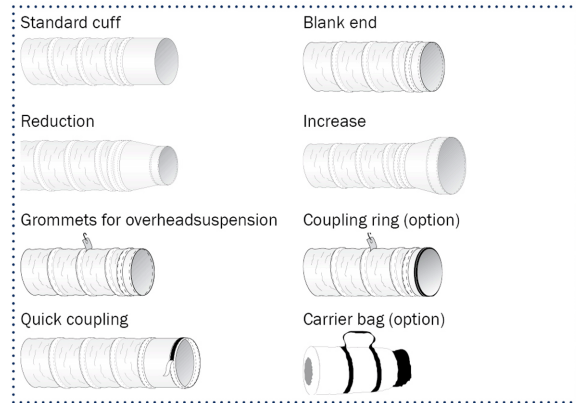

## Technical description

Neoprene-coated glass fibre cord, black, swen in spiral onto a spring steel helix. An exterior black TPE scuff strip protects the helix.  
Temperature range: - 40 °C to + 120 °C (intermittent: + 150 °C).  
Special properties: possible option, on request: NATO green, insulated.  
Standard/Approval:  
fire resistant according to the french regulation M1.

## Couplings/Fittings

Standard: connexion by clamp.  
Option on request: coupling ring and clamp.  
Accessories and cuffs.

## Complementary information

Standard production length = 7.5 m (with standard cuffs).  
Other lengths on request (min. length = 0.5 m).  
Packaging in card board boxes.  
Technical data for working conditions at 20 °C temperature.

# KLEGAINE GTLN

08/07/2011

ID mm	Wall thickness mm	Ends length mm	Working pressure bar	Max. vacuum bar	Weight kg/m	Length m	Article number	Stock (n) or min. order m
125	0.35 ± 0.04	100	0.55	0.06	1.24	7.5	0085718	7.5
150	0.35 ± 0.04	100	0.4	0.053	1.65	7.5	0085719	7.5
160	0.35 ± 0.04	100	0.4	0.053	1.3	7.5	5009362	7.5
170	0.35 ± 0.04	100	0.4	0.053	1.35	7.5	5009363	7.5
180	0.35 ± 0.04	100	0.4	0.053	1.42	7.5	0085720	7.5
200	0.35 ± 0.04	100	0.35	0.045	1.55	7.5	0085721	7.5
225	0.35 ± 0.04	100	0.35	0.042	1.75	7.5	0085722	7.5
250	0.35 ± 0.04	100	0.3	0.039	1.92	7.5	0085724	7.5
300	0.35 ± 0.04	100	0.25	0.031	2.3	7.5	0085725	7.5
350	0.35 ± 0.04	150	0.2	0.028	2.4	7.5	0085726	7.5
400	0.35 ± 0.04	150	0.15	0.026	2.75	7.5	0085728	7.5
450	0.35 ± 0.04	150	0.15	0.026	3.1	7.5	0085730	7.5
500	0.35 ± 0.04	150	0.15	0.025	3.42	7.5	0085731	7.5
600	0.35 ± 0.04	150	0.1	0.020	4.12	7.5	0085733	7.5
700	0.35 ± 0.04	150	0.05	0.020	4.8	7.5	5009364	7.5
750	0.35 ± 0.04	200	0.05	0.018	5.0	7.5	5009365	7.5
800	0.35 ± 0.04	200	0.03	0.016	5.35	7.5	5009366	7.5
850	0.35 ± 0.04	200	0.03	0.013	5.65	7.5	5009367	7.5
900	0.35 ± 0.04	200	0.03	0.010	6.0	7.5	5009368	7.5
950	0.35 ± 0.04	200	0.03	0.008	6.3	7.5	5009369	7.5
1000	0.35 ± 0.04	200	0.03	0.007	6.7	7.5	5009370	7.5

Branding

No branding.



Trelleborg Industrie SAS - ZI La Combaude - Rue de Chantemerle - 63050 Clermont-Ferrand Cedex 2 - France  
www.trelleborg.com/industrialhose