


# KLEGAINE GTNR +

## INDUSTRIAL MAINTENANCE

Industrial ducting hoses/Elastomer-coated fibre cord

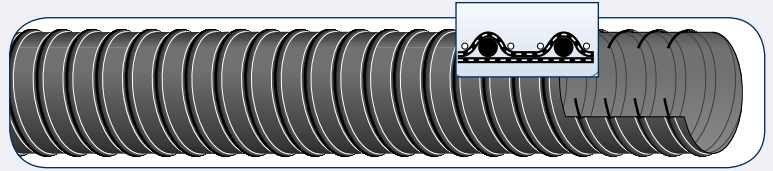

### Applications

For conveying hot and cold air, fumes, or light non-abrasive dust at low pressures when maximum flexibility is required.

For light duty service conditions.

Excellent for installations where space is at a premium and manoeuvrability is required.

Ideal for air intake to cool motors.

### Advantages

- Light weight and easy to handle.
- Highly compressible to minimise storage.
- Good low temperature flexibility.
- Good resistance to many oils, greases, solvents, and industrial chemicals in the vapour phase at moderate concentration.
- Smooth inner tube for optimum flow.
- Double neoprene wall.

### Technical description

**Inner tube:** Neoprene-coated glass fibre cord, black, smooth.

**Reinforcement:** steel embedded helix.

**Cover:** neoprene-coated glass fibre cord, black, reinforced by two white glass fibre yarns, corrugated.

**Temperature range:** - 50 °C to + 150 °C.

### Couplings and fittings

Standard: connexion by clamp.

### Complementary information

Available with a variety of factory fitted cuff styles on request.

Length > 4 m, ID ≥ 25 mm: consult us (possible production length up to 10 m with 2 joints).

## KLEGAINE GTNR +

18/02/2009

ID	Wall thickness		Working pressure	Max vacuum	Bending radius	Weight	Length	Article number	Stock (■) or min. order
mm	mm		bar	bar	mm	kg/m	m		m
19	0.65	± 0.03	2.17	0.50	10	0.13	2.5	5009381	2.5
25	0.65	± 0.03	1.97	0.50	14	0.15	4	0070742	4
32	0.65	± 0.03	1.78	0.50	18	0.20	4	0070743	4
38	0.65	± 0.03	1.68	0.41	20	0.23	4	0085460	4
41	0.65	± 0.03	1.68	0.41	20	0.25	4	5009361	4
44	0.65	± 0.03	1.68	0.41	20	0.26	4	0085011	4
51	0.65	± 0.03	1.68	0.41	25	0.30	4	0070744	4
60	0.65	± 0.03	1.48	0.38	28	0.34	4	0070745	4
63	0.65	± 0.03	1.38	0.33	30	0.36	4	0070746	4
70	0.65	± 0.03	1.38	0.33	33	0.42	4	0070747	4
76	0.65	± 0.03	1.38	0.33	34	0.46	4	0085472	4
80	0.65	± 0.03	1.38	0.30	35	0.48	4	0085159	4
89	0.65	± 0.03	1.18	0.29	36	0.53	4	0085465	4
102	0.65	± 0.03	0.99	0.25	38	0.60	4	0085514	4
114	0.65	± 0.03	0.79	0.23	40	0.75	4	0070748	4
121	0.65	± 0.03	0.69	0.23	40	0.80	4	5009249	4
127	0.65	± 0.03	0.69	0.21	41	0.85	4	0070749	4
140	0.65	± 0.03	0.54	0.16	48	1.07	4	0070750	4
152	0.65	± 0.03	0.54	0.16	55	1.10	4	0070751	4
165	0.65	± 0.03	0.44	0.10	62	1.22	4	0085058	4
178	0.65	± 0.03	0.44	0.10	65	1.27	4	0070752	4
203	0.65	± 0.03	0.35	0.07	80	1.42	4	0085413	4

Technical data for working conditions at 20 °C temperature.

No branding

