


# AG2100 Marine corrugated

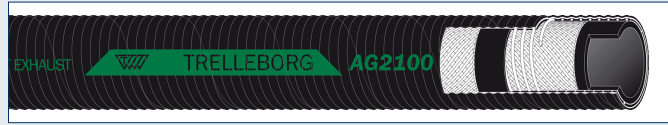

INDUSTRIAL MAINTENANCE  
Exhaust gas hoses

## Applications

Marine engine wet exhaust systems where the exhaust gases are mixed with the discharge of cooling water.

## Advantages

- n Extreme flexibility.
- n Low weight.
- n Weather and ageing resistant.
- n Corrugated and user friendly.
- n DNV approved.

## Technical description

Inner tube: CR, black, smooth.

Reinforcement: synthetic textile with steel wire embedded helix.

Cover: CR, black, fabric impression, corrugated.

Temperature range: - 30 °C to + 100 °C. Can intermittent withstand +580 °C.

## Couplings/Fittings

Clamps.

## Complementary information

Certified by DNV in accordance to ISO 13363 type 2, SAE J 2006 type R2, Nordic Boat Standard MC9.  
Other dimensions available on request.

# AG2100 Marine corrugated

12/01/2012

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m
76	5.0 ± 0.6	86.0 ± 1.2	3.0	9	0.9	200	1.81	20	5500796	40
								40	0071151	40
90	5.0 ± 0.7	100.0 ± 1.3	2.0	6	0.9	230	2.16	20	0071152	40
								40	5500797	40
102	5.0 ± 0.7	112.0 ± 1.3	2.0	6	0.9	275	2.42	20	0071153	80
								40	5500798	80
127	5.5 ± 0.7	138.0 ± 1.4	2.0	6	0.9	425	2.97	20	0071154	80
								40	5500799	80
152	5.5 ± 0.7	163.0 ± 1.4	2.0	6	0.9	550	3.52	20	0071155	40
205	6.5 ± 1.0	217.0 ± 2.0	1.5	5	0.8	720	6.0	20	5014028	20

## Branding



and embossed: TRELLEBORG - AG 2100 - MARINE WET EXHAUST - SAE J2006R2 - ISO 13363.2A (580 °C) - MC9 - ID - month/year



Trelleborg Industrie SAS - ZI La Combaude - Rue de Chantemerle - 63050 Clermont-Ferrand Cedex 2 - France  
www.trelleborg.com/industrialhose