


KLEGAINE GPU-M

INDUSTRIAL MAINTENANCE
Industrial ducting hoses/Polyurethane

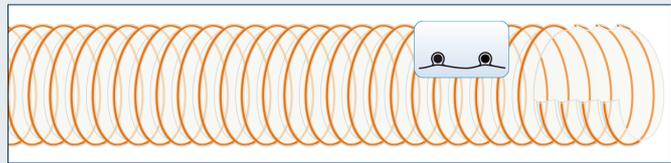

Applications

Ideal in the wood working industries, foundries and other general applications.
Ideal for the conveyance of powders, abrasives particles, dust, sawdust, clips, textile fibers, metal filings.
Industrial vacuum cleaners.
Suitable for fume extraction in chemical and oil industries.
Wire conduit in robots and machine tool.

Advantages

- n Light and very flexible, flexible at low temperature.
- n Outstanding resistance to abrasion and piercing.
- n Excellent flex properties and resistance when used in motion.
- n Copper-coated steel helix, crush resistant.
- n Very smooth inner tube ensures optimum flow.
- n Good resistance to ozone and UV.
- n Good resistance to most of oils, solvents and industrial chemicals in the vapour phase at moderate concentration.

Technical description

Ester-base polyurethane wall, transparent, smooth inside.
Reinforcement: copper-coated steel helix.
Temperature range: - 30 °C to + 100 °C.
Electrical properties: non conductive. Both ends of the helix can be connected to the couplings/fittings, if conductivity is required.
Special properties: Abrasion DIN 53516: 30 mm³.
Halogen and plastiziser free.

Couplings/Fittings

Standard: connexion by clamp.

Complementary information

Technical data for working conditions at 20 °C temperature.

KLEGAINE GPU-M

07/07/2011

ID mm	Wall thickness mm	Working pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m
25	0.50 ± 0.05	1.65	0.40	25	0.16	10	5009226	30
30	0.50 ± 0.05	1.6	0.38	30	0.18	10	5009227	30
35	0.50 ± 0.05	1.4	0.30	35	0.22	10	5009228	30
40	0.50 ± 0.05	1.4	0.30	40	0.28	10	0085531	30
45	0.50 ± 0.05	1.4	0.30	45	0.28	10	0085532	30
50	0.50 ± 0.05	1.3	0.29	50	0.37	10	0085533	n
51	0.50 ± 0.05	1.3	0.29	51	0.38	10	5009229	30
60	0.50 ± 0.05	1.1	0.26	60	0.48	10	0085534	30
65	0.50 ± 0.05	1.1	0.26	65	0.48	10	0085535	30
70	0.50 ± 0.05	0.9	0.26	70	0.48	10	0085536	30
75	0.50 ± 0.05	0.8	0.21	75	0.6	10	0085537	30
76	0.50 ± 0.05	0.8	0.21	76	0.6	10	5009230	30
80	0.50 ± 0.05	0.7	0.18	80	0.62	10	0085538	30
90	0.50 ± 0.05	0.7	0.18	90	0.71	10	0085539	30
100	0.55 ± 0.05	0.6	0.16	100	0.79	10	0085540	n
102	0.55 ± 0.05	0.6	0.16	102	0.8	10	5009231	30
110	0.55 ± 0.05	0.5	0.16	110	0.83	10	0085541	30
120	0.55 ± 0.05	0.45	0.12	120	0.9	10	0085542	30
125	0.55 ± 0.05	0.4	0.12	125	0.95	10	5009232	n
130	0.55 ± 0.05	0.4	0.12	130	1.0	10	0085543	30
140	0.55 ± 0.05	0.3	0.10	140	1.1	10	0085544	30
150	0.55 ± 0.05	0.25	0.10	150	1.2	10	0085545	n
160	0.55 ± 0.05	0.25	0.10	160	1.35	10	0085546	30
180	0.70 ± 0.05	0.2	0.09	180	1.5	10	0085547	30
200	0.70 ± 0.05	0.18	0.09	200	1.65	10	0085548	30
203	0.70 ± 0.05	0.18	0.09	203	1.67	10	5009233	30
225	0.70 ± 0.05	0.15	0.08	225	1.98	10	0085549	10
250	0.70 ± 0.05	0.15	0.08	250	2.2	10	0085550	10
300	0.70 ± 0.05	0.12	0.06	300	2.6	10	0085551	20
350	0.75 ± 0.05	0.1	0.04	350	2.9	10	0085552	10
400	0.75 ± 0.05	0.08	0.02	400	3.4	5	5009234	5
500	0.75 ± 0.05	0.04	0.01	500	4.2	5	5009235	5



TRELLEBORG
ENGINEERED SYSTEMS

Trelleborg Industrie SAS - ZI La Combaude - Rue de Chantemerle - 63050 Clermont-Ferrand Cedex 2 - France
www.trelleborg.com/industrialhose

KLEGAINE GPU-M

07/07/2011

ID mm	Wall thickness mm	Working pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m
Branding No branding.								



TRELLEBORG

ENGINEERED SYSTEMS

Trelleborg Industrie SAS - ZI La Combaude - Rue de Chantemerle - 63050 Clermont-Ferrand Cedex 2 - France
www.trelleborg.com/industrialhose