


AG 1000 HT

INDUSTRIAL MAINTENANCE
Exhaust gas hoses

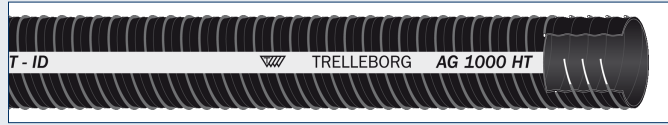

Applications

Extraction of exhaust gases and other hot gases from motor vehicles.
For all types of spring recoil exhaust hose reels, exhaust fume extractors, and also exhaust rails for moving vehicles.

Advantages

- Extremely low weight and flexibility makes the hose especially suitable for manual handling.
- Smooth inside reduces friction less.
- Manufactured with a polyester helix as standard.
- The polyester helix makes the hose regain original shape when ran over by motor vehicle.
- Hose lengths can be connected by screwing them together.
- Also available with steel helix in order to withstand higher vacuum.

Technical description

Inner tube: heat resistant, rubberized fabric, EPDM/polyester, black.
Reinforcement: EPDM-coated polyester.
Cover: outside rubberised helix, black.
Temperature range: - 40 °C to + 180 °C .

Complementary information

Packed in cartons.

AG 1000 HT

01/03/2011

ID mm	Wall thickness mm	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m
32	1.0	0.60	40	0.28	10	1977880	n
38	1.0	0.55	50	0.32	10	1977840	10
51	1.0	0.40	65	0.42	10	2860230	n
63	1.0	0.30	80	0.53	10	2210510	n
76	1.0	0.25	95	0.6	10	2059150	n
102	1.0	0.20	110	0.85	10	2059160	n
127	1.0	0.15	130	1.04	10	1693510	n
152	1.0	0.10	140	1.24	10	1692920	n
204	1.0	0.03	190	1.68	10	2955920	n

Branding



TRELLEBORG AG 1000 HT - ID



TRELLEBORG
ENGINEERED SYSTEMS

Trelleborg Industrie SAS - ZI La Combaude - Rue de Chantemerle - 63050 Clermont-Ferrand Cedex 2 - France
www.trelleborg.com/industrialhose