


KLEGAINE GHT 450

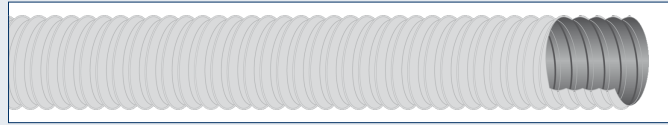

INDUSTRIAL MAINTENANCE
Industrial ducting hoses/Elastomer-coated fibre cord

Applications


Extreme temperature ducting for conveying hot air, gas and dust in any industrial environment: steel industry, etc.

Advantages

- n Good heat resistance.
- n Good mechanical resistance, very flexible.
- n Compressible.

Technical description

Flexible and lighth ducting, made with 2 layers of coated glass fibre cord.
Metal clipped helix.
Inner tube: grey.
Cover: grey.
Temperature range: - 20 °C to + 450 °C (500 °C temporarily).

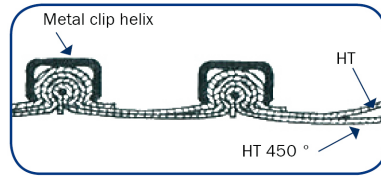

Complementary information

Technical data for working conditions at 20 °C temperature.

KLEGAINE GHT 450

08/07/2011

ID mm	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m
50	0.360	50	0.46	3	5501544	3
60	0.260	60	0.46	3	5501545	3
70	0.190	70	0.65	3	5501546	3
75	0.160	75	0.7	3	5501547	3
80	0.150	80	0.77	3	5501548	3
90	0.120	90	0.84	3	5501549	3
102	0.100	97	0.93	3	5501550	3
110	0.080	99	1.02	3	5501551	3
120	0.060	108	1.1	3	5501552	3
127	0.060	114	1.16	3	5501553	3
130	0.050	120	1.2	3	5501632	□
152	0.040	137	1.21	3	5501554	3
160	0.040	144	1.29	3	5501555	3
180	0.030	190	1.46	3	5501556	3
203	0.024	200	2.27	3	5501557	3
250	0.016	240	2.84	3	5501558	3
300	0.011	250	2.94	3	5501559	3
350	0.008	300	3.43	3	5501560	3
400	0.006	350	3.93	3	5501561	3
450	0.005	360	3.93	3	5501633	□
500	0.004	400	4.37	3	5501562	3
550	0.003	440	4.81	3	5501634	□
600	0.003	480	5.25	3	5501563	3
700	0.002	550	6.12	3	5501564	3
800	0.002	650	7.0	3	5501565	3
900	0.001	720	7.87	3	5501566	3
1000	0.001	800	8.74	3	5501567	3

□ Upon availability.

Branding

No branding.



Trelleborg Industrie SAS - ZI La Combaude - Rue de Chantemerle - 63050 Clermont-Ferrand Cedex 2 - France
www.trelleborg.com/industrialhose