




Applications

For cooling systems, transport of hot water, glycol etc. May even be used for transporting certain chemicals (see chemical resistance table for EPDM).

Advantages

- A light, general purpose coolant and chemical hose.

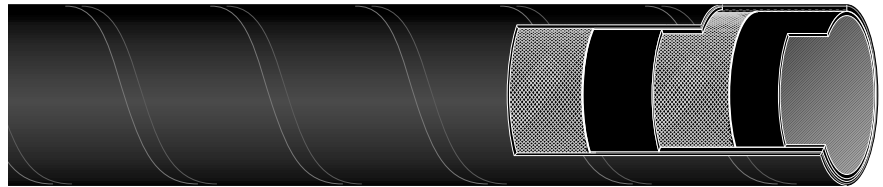

Technical description

Inner tube: chemical resistant EPDM-rubber, black, smooth.
Reinforcement: synthetic textile, spinned on $\varnothing < 76$ mm and braided on $\varnothing \geq 76$ mm.
Cover: weather resistant EPDM, black, fabric impression.
Temperature range: -30 °C to $+120$ °C.
Branding: unbranded

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
13.0	4.5	22.0	2	8	65	0.30	40	26658	•
16.0	4.5	25.0	2	8	80	0.34	40	26666	•
20.0	4.5	29.0	2	8	95	0.40	40	26674	•
22.0	4.5	31.0	2	8	110	0.43	40	26682	•
25.0	4.5	34.0	2	8	125	0.48	40	26690	•
28.0	5.0	38.0	2	8	145	0.54	40	26708	•
32.0	5.0	42.0	2	8	160	0.61	40	26716	•
40.0	5.0	50.0	2	8	190	0.73	40	26724	•
42.0	5.0	52.0	2	8	220	0.76	40	26732	•
45.0	5.0	55.0	2	8	230	0.81	40	99689	•
50.0	5.0	60.0	2	8	255	1.09	40	99697	•
57.0	5.5	68.0	2	8	285	1.22	40	99705	•
63.0	5.5	74.0	2	8	315	1.33	40	99713	•
70.0	5.5	81.0	2	8	360	1.46	40	99721	•
76.0	5.5	87.0	2	8	380	1.62	40	99739	•
80.0	5.5	91.0	2	8	400	1.70	40	99747	1
89.0	6.0	101.0	2	8	540	1.86	40	99754	•
100.0	5.5	111.0	2	8	600	2.07	40	99762	1

• = Stock item.

1 = Non stock, mini. quantity = 120 m.