


OST

INDUSTRIAL MAINTENANCE
Water/Suction applications

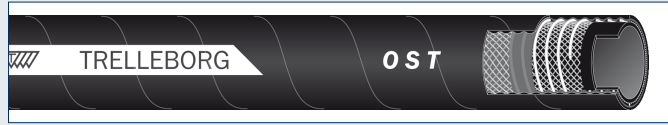

Applications

For suction and discharge of domestic water, industrial water, effluents, slurry and liquid manure.

Advantages

- n Wide range of diameters to suit pumps in all fields of industry.
- n Excellent flexibility.
- n Constant working pressure of 10 bar throughout the range.

Technical description

Inner tube: SBR, black, smooth.
Reinforcement: synthetic textile with embedded steel helix.
Cover: SBR, black, fabric impression.
Temperature range: - 30 °C to + 60 °C .

OST											21/01/2011
ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m	
25	4.75 ± 0.75	35.0 ± 1.0	10.0	30	0.9	75	0.77	20	5501761	200	
								40	5501762	200	
28	4.75 ± 0.75	38.0 ± 1.0	10.0	30	0.9	85	0.83	20	5501763	200	
								40	5501764	200	
30	4.75 ± 0.75	40.0 ± 1.0	10.0	30	0.9	90	0.86	20	5501765	200	
								40	5501766	200	
32	4.75 ± 0.75	42.0 ± 1.0	10.0	30	0.9	95	0.91	20	5501767	400	
								40	5501768	400	
35	4.75 ± 0.75	45.0 ± 1.0	10.0	30	0.9	105	0.96	20	5501769	200	
								40	5501770	n	
38	4.75 ± 0.75	48.0 ± 1.0	10.0	30	0.9	115	1.04	20	5501771	200	
								40	5501772	200	
40	4.75 ± 0.75	50.0 ± 1.0	10.0	30	0.9	160	1.06	20	5501773	400	
								40	5501774	400	
43	4.75 ± 0.75	53.0 ± 1.0	10.0	30	0.9	170	1.15	20	5501775	400	
								40	5501776	400	
45	4.75 ± 0.75	55.0 ± 1.0	10.0	30	0.9	180	1.18	20	5501777	200	
								40	5501778	200	
50	5.25 ± 1.00	61.0 ± 1.5	10.0	30	0.9	200	1.61	20	5501779	n	
								40	5012823	n	
53	5.25 ± 1.00	64.0 ± 1.5	10.0	30	0.9	210	1.68	20	5501781	400	
								40	5501782	400	
55	5.25 ± 1.00	66.0 ± 1.5	10.0	30	0.9	220	1.74	20	5501783	400	
								40	5501784	400	
60	5.25 ± 1.00	71.0 ± 1.5	10.0	30	0.9	240	1.84	20	5501785	n	
								40	5501786	n	
63	5.75 ± 1.00	75.0 ± 1.5	10.0	30	0.9	250	1.91	20	5501787	200	
								40	5501788	200	
65	5.75 ± 1.00	77.0 ± 1.5	10.0	30	0.9	290	1.97	20	5501789	200	
								40	5501790	200	
68	5.75 ± 1.00	80.0 ± 1.5	10.0	30	0.9	305	2.22	20	5501791	200	
								40	5501792	200	
70	5.75 ± 1.00	82.0 ± 1.5	10.0	30	0.9	315	2.3	20	5501793	200	
								40	5501794	200	
75	5.75 ± 1.00	87.0 ± 1.5	10.0	30	0.9	335	2.44	20	5501795	n	
								40	5501796	n	
80	6.25 ± 1.00	93.0 ± 1.5	10.0	30	0.9	400	2.78	20	5501797	200	
								40	5501798	200	
89	6.25 ± 1.00	102.0 ± 1.5	10.0	30	0.9	445	3.06	20	5501799	160	
								40	5501800	160	
100	6.50 ± 1.00	113.5 ± 1.5	10.0	30	0.9	500	3.44	20	5501801	n	
								40	5012824	n	
127	7.00 ± 1.00	141.0 ± 2.0	10.0	30	0.9	650	5.46	20	5501803	120	
								40	5501804	120	



OST

21/01/2011

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m
152	7.00 ± 1.00	166.0 ± 2.0	10.0	30	0.9	800	6.55	20	5501805	n
								40	5501806	n

Branding

