


# RED WATER

INDUSTRIAL MAINTENANCE  
Water/Discharge applications

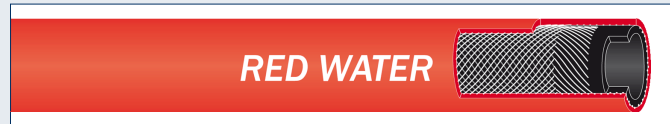

## Applications

Water discharge under pressure on industrial or urban sites.

## Advantages

- n Sturdy hose.
- n Good resistance to abrasion thanks to wall thickness.

## Technical description

Inner tube: SBR, black, smooth.

Reinforcement: synthetic textile.

Cover: SBR, red, smooth for ID ≤ 25 mm, corrugated for ID > 25 mm.

Temperature range: - 25 °C to + 70 °C .

## RED WATER

23/02/2011

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock ( n ) or min. order m
13	4	21	10.0	30	78	0.364	40	5503031	n
16	4	24	10.0	30	96	0.43	20 40	5503404 5503040	n n
19	4.5	28	10.0	30	115	0.565	20 40	5503405 5503032	n n
25	5	35	10.0	30	150	0.8	20 40	5503406 5503033	n n
32	5.5	43	10.0	30	200	0.9	40	5503034	n
38	6	50	10.0	30	210	1.0	40	5503035	n
45	6.5	58	10.0	30	330	1.35	40	5503094	400
51	7	65	10.0	30	400	1.6	40	5503036	200
57	7	71	10.0	30	570	1.65	40	5503095	400
63	7	77	10.0	30	630	1.75	40	5503096	400
76	8	92	10.0	30	750	2.0	40	5503093	400
89	8	105	10.0	30	900	2.25	40	5503097	400
100	8	116	10.0	30	1000	3.2	40	5503079	240
114	8	130	10.0	30	1200	3.325	40	5503098	240
127	8.5	144	10.0	30	1300	3.925	40	5503099	240
152	9	170	10.0	30	1600	4.925	40	5503100	200

Branding

**TRELLEBORG**

**RED WATER**



**TRELLEBORG**  
ENGINEERED SYSTEMS

Trelleborg Industrie SAS - ZI La Combaude - Rue de Chantemerle - 63050 Clermont-Ferrand Cedex 2 - France  
[www.trelleborg.com/industrialhose](http://www.trelleborg.com/industrialhose)