


# CRISAL AL

INDUSTRIAL MAINTENANCE  
Air/Compressed air applications

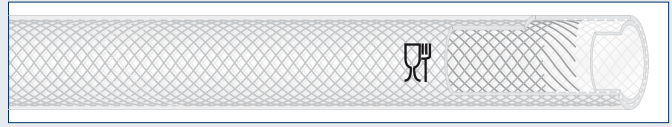

## Applications

Air hose also suitable for discharge of water and liquid foodstuffs.  
Not suitable for the transport of fatty foods, including dairy products.

## Advantages

- n Light, flexible, multipurpose hose (see separate chemical resistance table).
- n Comprehensive range of diameters.
- n Food quality compliant with the european directive 2007/19/CE.

## Technical description

Inner tube: PVC, transparent, smooth.  
Reinforcement: synthetic textile, yarns.

Cover: PVC, transparent, smooth.

Temperature range: - 15 °C to + 60 °C.

Standard/Approval:

complies with european directive 2007/19/EC for the transfer of non-fatty food and various alcohol.

## Complementary information

Working pressure and bursting pressure mentioned are valid at + 20 °C.

Hoses delivered in carton boxes :

ID 6mm = 8 x 25, 4 x 50

ID 8mm = 6 x 25, 3 x 50

ID 9mm = 6 x 25, 3 x 50

ID 10mm = 6 x 25, 3 x 50

ID 12mm = 4 x 25, 2 x 50.

# CRISAL AL

13/10/2011

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock ( n ) or min. order m	
6	± 0.5	3.00	12.0 ± 0.25	15.0	45	55	0.1	200	0202564	n
									0202565	n
8	± 0.6	3.00	14.0 ± 0.25	15.0	45	65	0.13	150	0202566	n
								150	0202567	n
9	± 0.6	3.00	15.0 ± 0.25	15.0	45	70	0.14	150	0202568	2250
								150	0202569	1500
10	± 0.6	3.00	16.0 ± 0.25	15.0	45	75	0.15	150	0202570	n
								150	0202571	n
12	± 0.6	3.00	18.0 ± 0.25	15.0	45	82	0.17	100	0202572	n
								100	0202573	n
13	± 0.6	3.50	20.0 ± 0.25	10.0	30	90	0.22	25	0202574	n
								50	0202575	n
16	± 0.8	3.25	22.5 ± 0.25	10.0	30	100	0.24	25	0202576	n
								50	0202577	n
19	± 0.8	4.00	27.0 ± 0.40	6.0	24	125	0.35	25	0202542	n
								50	0202543	n
25	± 1.0	4.50	34.0 ± 0.40	6.0	18	155	0.51	25	0202544	n
								50	0202545	n
32	± 1.0	5.00	42.0 ± 0.50	6.0	18	190	0.72	25	0202546	n
								50	0202547	n
38	± 1.0	5.00	48.0 ± 0.50	6.0	18	215	0.83	25	0202548	n
50	± 1.0	7.00	64.0 ± 0.50	6.0	18	300	1.55	25	0202549	n

Branding



Trelleborg Industrie SAS - ZI La Combaude - Rue de Chantemerle - 63050 Clermont-Ferrand Cedex 2 - France  
www.trelleborg.com/industrialhose