


# BOAT FUEL HOSE ISO 7840 A1

INDUSTRIAL MAINTENANCE  
Oil and petroleum

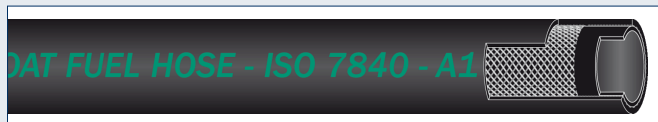

## Applications

Fire resistant fuel line hose in boat applications.  
In compliance with CEN requirements for leisure boats.

## Advantages

- n Meets the highest requirement in permeation resistance.
- n Certified by International Maritime Certification Institute.

## Technical description

Inner tube: NBR, black, smooth.  
Reinforcement: synthetic textile braided with embedded steel helix for ID > 25 mm.  
Cover: CR, black, smooth for ID ≤ 25 mm, fine fabric impression for ID > 25 mm.  
Temperature range: - 30 °C to + 100 °C .

## Complementary information

Other dimensions available on request.  
Complies also with SAE J 1527 type B1.

# BOAT FUEL HOSE ISO 7840 A1

01/03/2011

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m
5 ± 0.75	3.75	12.5 ± 0.9	10.0	30	0.8	20	0.15	20	0061793	1960
								40	0061792	1960
6.3 ± 0.75	4.10	14.5 ± 0.9	10.0	30	0.8	23	0.18	20	0061795	2000
								40	0061794	2000
8 ± 0.75	4.00	16.0 ± 0.9	10.0	30	0.8	25	0.22	20	0061797	n
								40	0061796	n
10 ± 0.75	4.25	18.5 ± 0.9	10.0	30	0.8	35	0.28	20	0061799	n
								40	0061798	n
12.5 ± 0.75	4.25	21.0 ± 0.9	10.0	30	0.35	45	0.35	20	0061801	1800
								40	0061800	1800
16 ± 0.75	4.50	25.0 ± 0.9	10.0	30	0.35	65	0.42	20	0061803	n
								40	0061802	n
19 ± 0.75	4.75	28.5 ± 0.9	10.0	30	0.35	80	0.51	20	0061805	n
								40	0061804	n
25 ± 1.25	5.00	35.0 ± 1.4	10.0	30	0.35	110	0.69	20	0061807	n
								40	0061806	n
40 ± 1.5	7.75	55.5 ± 1.5	10.0	30	0.8	160	1.79	20	0061809	400
								40	0061808	400
50 ± 1.5	7.75	65.5 ± 1.5	10.0	30	0.8	200	2.11	20	0061811	400
								40	0061810	400
63 ± 1.5	7.75	78.5 ± 1.5	10.0	30	0.8	250	2.55	20	0061813	200
								40	0061812	200

n Upon availability.

## Branding

Branding for ID from 5 to 25 mm :



and embossed: week - year

Branding for ID from 40 to 63 mm :



and embossed: TRELLEBORG - ISO 7840 - A1 - week - year - CE



Trelleborg Industrie SAS - ZI La Combaude - Rue de Chantemerle - 63050 Clermont-Ferrand Cedex 2 - France  
www.trelleborg.com/industrialhose