


STARKLER

INDUSTRIAL MAINTENANCE
Water/Discharge applications

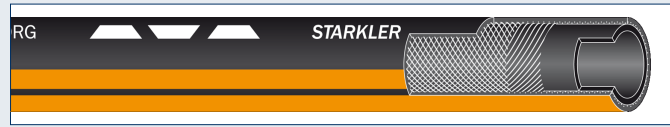

Applications

A versatile hose for high pressure cleaning operations and general discharge service using hot or cold water and many other fluids (see chemical resistance table for EPDM).

Suitable for all sectors: building and public works, industry, agriculture, etc.

Advantages

- n Extremely resistant to ageing and atmospheric conditions.
- n Wide range of operating temperatures (- 30 °C to + 100 °C).
- n Wide range of diameters.
- n Excellent mechanical properties.
- n Resistant to many fluids.
- n Attractive, well-finished appearance.
- n Long service life.

Technical description

Inner tube: EPDM, black, smooth.

Reinforcement: synthetic textile.

Cover: EPDM, black, smooth for ID from 12.7 to 25.4 mm, fabric impression for ID from 30 to 100 mm.

Temperature range: - 30 °C to + 100 °C .

Standard/Approval: in compliance with NF EN ISO 1403 type 2 (except branding).

STARKLER

19/04/2011

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m
12.7 ± 0.6	4.00	20.7 ± 0.7	20.0	60	55	0.27	20	0060012	n
							40	0060013	n
							80	0060990	n
15.8 ± 0.7	4.10	24.0 ± 0.8	20.0	60	70	0.33	20	0060014	n
							40	0060015	n
							80	0060991	n
19.4 ± 0.7	4.50	28.4 ± 0.8	20.0	60	85	0.43	20	0060016	n
							40	0060017	n
							80	0060992	n
25.4 ± 1.0	4.80	35.0 ± 1.1	20.0	60	100	0.58	20	0060018	n
							40	0060019	n
							80	0060993	n
30 ± 1.0	4.25	39.0 ± 1.0	10.0	31.5	240	0.72	20	0200259	n
							40	0200260	n
32 ± 1.0	4.25	41.0 ± 1.0	10.0	31.5	260	0.77	20	0123234	n
							40	0123239	n
35 ± 1.0	4.25	44.0 ± 1.0	10.0	31.5	280	0.83	20	0200261	n
							40	0200262	n
38 ± 1.0	4.25	47.0 ± 1.0	10.0	31.5	310	0.89	20	0123245	200
							40	0070387	200

Branding

Branding for ID from 12.7 to 25.4 mm



and in opposite:



Branding for ID from 30 to 38 mm



TRELLEBORG
ENGINEERED SYSTEMS

Trelleborg Industrie SAS - ZI La Combaude - Rue de Chantemerle - 63050 Clermont-Ferrand Cedex 2 - France
www.trelleborg.com/industrialhose